


JSR SPRAY SYSTEMS (INDIA)

DESIGNERS & MFG. OF INDL. SPRAY NOZZLE, ACCESSORIES AND SPRAY SYSTEMS

Oil Spray Nozzles

Series J16

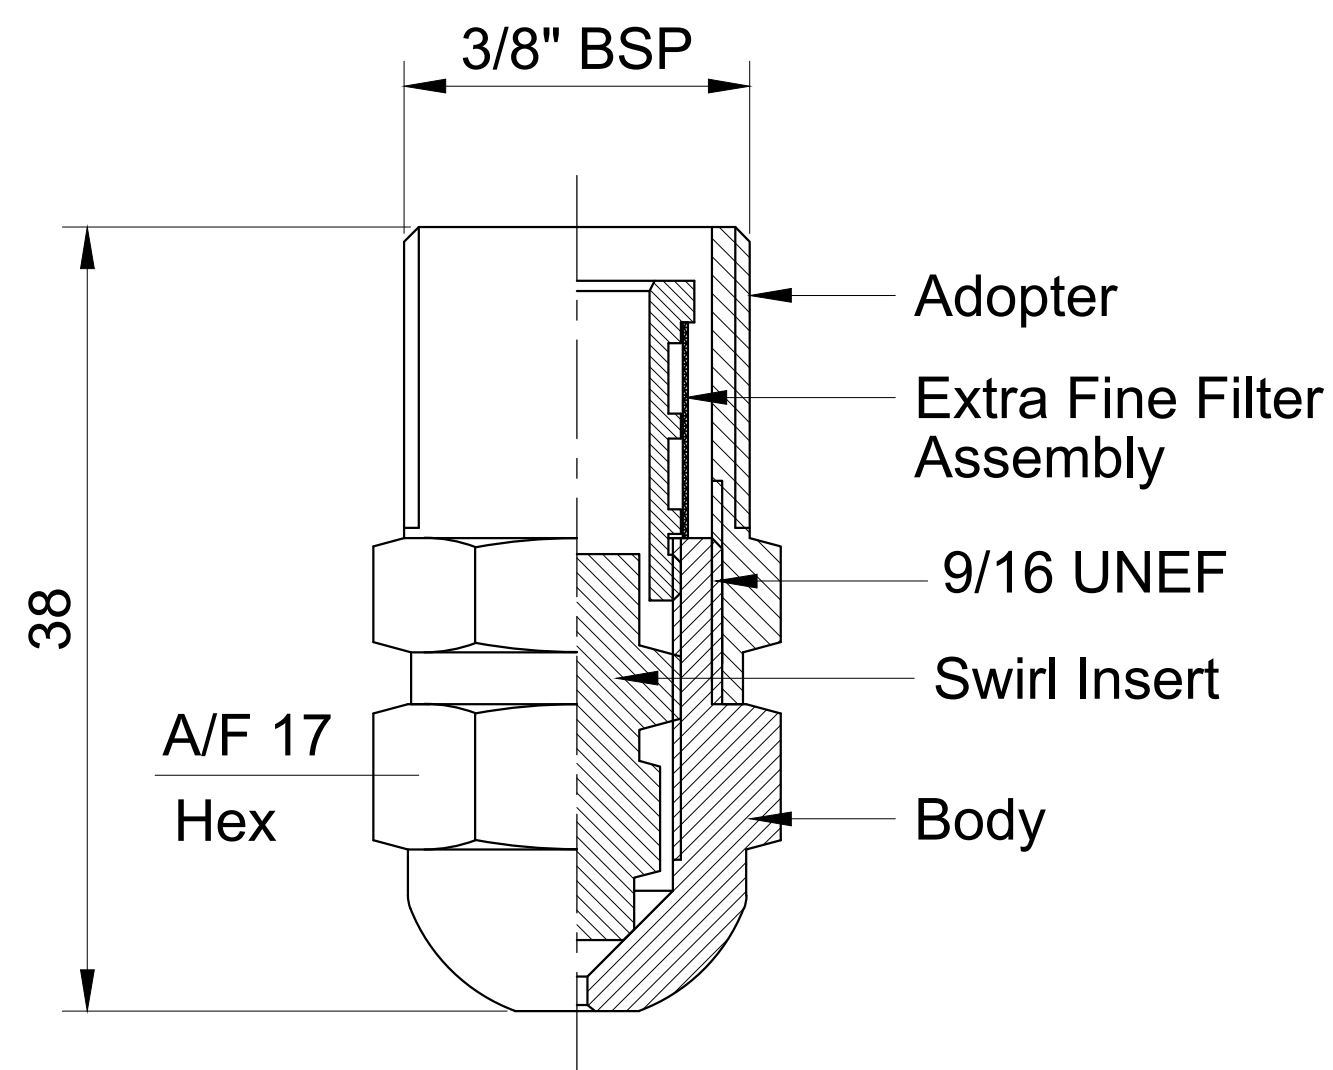

JSR Oil Spray Nozzles are design with Semi Hollowcone Spray pattern, It has a Swirl Insert part permitting flow only through the slot of the Insert . This Oil spray Nozzles are Assembled with Extra fine mesh filter in order to provide highly efficient in depth filtration .

Oil Spray Nozzles



Applications : Dust Control, Sponge, Iron Plants, LDO firing in kilns of cement



Available Spray Angles : 60°, 70°, 80°, 90°



End Connection : 3/8" BSP(M) & 9/16" UNF Or As Per Customer Requirement



Material : SS 303, SS316 & SS304 Or As Per Customer Requirement

FLOW RATE (GALLONS PER HOURS) @ DIFFERENT PRESSURE (PSI)

75	100	125	150	175	200
2.15	2.52	2.83	3.05	3.28	3.55
2.57	3.02	3.34	3.70	4.00	4.30
3.05	3.55	3.95	4.30	4.70	4.96
3.48	4.01	4.46	4.92	5.40	5.67
3.91	4.52	5.05	5.53	5.97	6.39
4.35	5.01	5.60	6.15	6.62	7.08
4.78	5.54	6.16	6.75	7.26	7.80
5.20	6.02	6.70	7.35	7.95	8.48
5.64	6.60	7.28	7.97	8.62	9.21